


**PLAN OF BOLLARD**

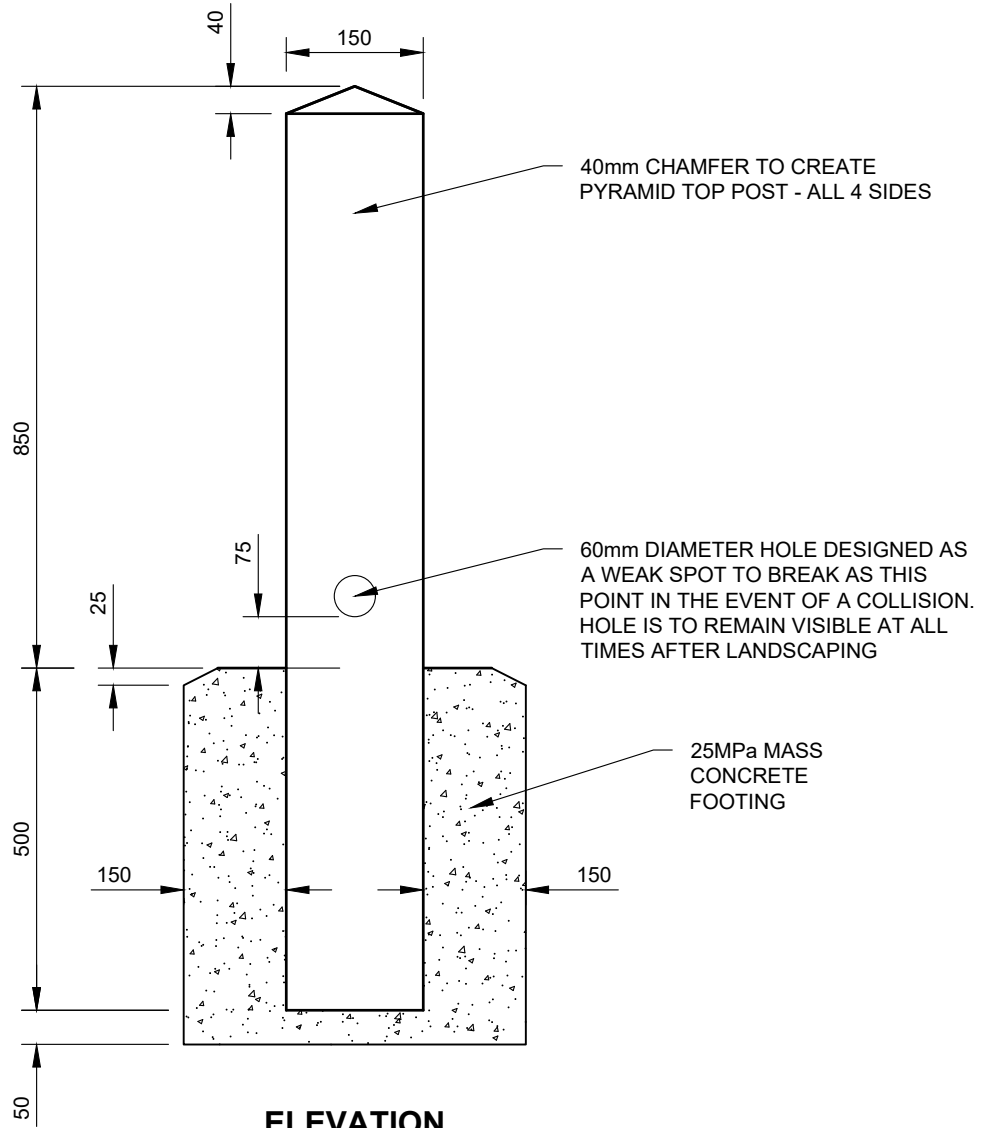

**ELEVATION**

**NOTES:**

1. BOLLARDS TO BE OFFSET AT LEAST 1m FROM BACK OF KERB.
2. ALL DIMENSIONS ARE IN MILLIMETRES.
3. CONCRETE STRENGTH OF 25MPa AT 28 DAYS.
4. BOLLARDS ARE TO BE INSTALLED WITH HOLES PERPENDICULAR TO THE DIRECTION OF TRAFFIC.
5. SPACING BETWEEN BOLLARDS TO BE 1.6m INCLUDING WHEN LOCATED ACROSS A PATH.
6. DELINEATION AS PER SD10-1 PROVIDED WHEN IN THE VICINITY OF SUP'S OR CYCLE PATH OR AS DIRECTED.
7. BOLLARDS SHALL BE MADE FROM COMPOSITE MATERIAL, RECYCLED PLASTIC OR FSC TIMBER AS APPROVED BY COUNCIL

Drawing name: M:\Engineering Services\Engineering Design Projects\RESOURCE References\WCC Standard Drawings\SD10-2.dwg (28 May, 2024)

REV	AMENDMENTS	APPROVAL	DATE
B	ADDED NOTE 4		12-01-2010
C	UPDATED TO REFLECT CURRENT STANDARDS	M.BRIGANDI	21-05-24

**FIXED BOLLARD DETAIL**

45 PRINCES HIGHWAY  
WERRIBEE, VIC 3030

TEL: 1300 023 411  
wyndham.vic.gov.au

CAD FILE: SD10-2.DWG
DRAWN DATE: FEB 2024
REVISION: C
DRAWING NO.: <b>SD10-2</b>

GENERAL NOTES: -DRAWINGS ARE NOT TO SCALE.  
 -ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS OTHERWISE STATED.  
 -FOR UP TO DATE DRAWINGS PLEASE CHECK WYNDHAM CITY COUNCIL WEBSITE.  
 -ALL STANDARD DRAWINGS TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).