


Drawing name: M:\Engineering Services\Engineering Design Projects\RESOURCE References\WCC Standard Drawings\SD8-1.dwg (28 May, 2024)

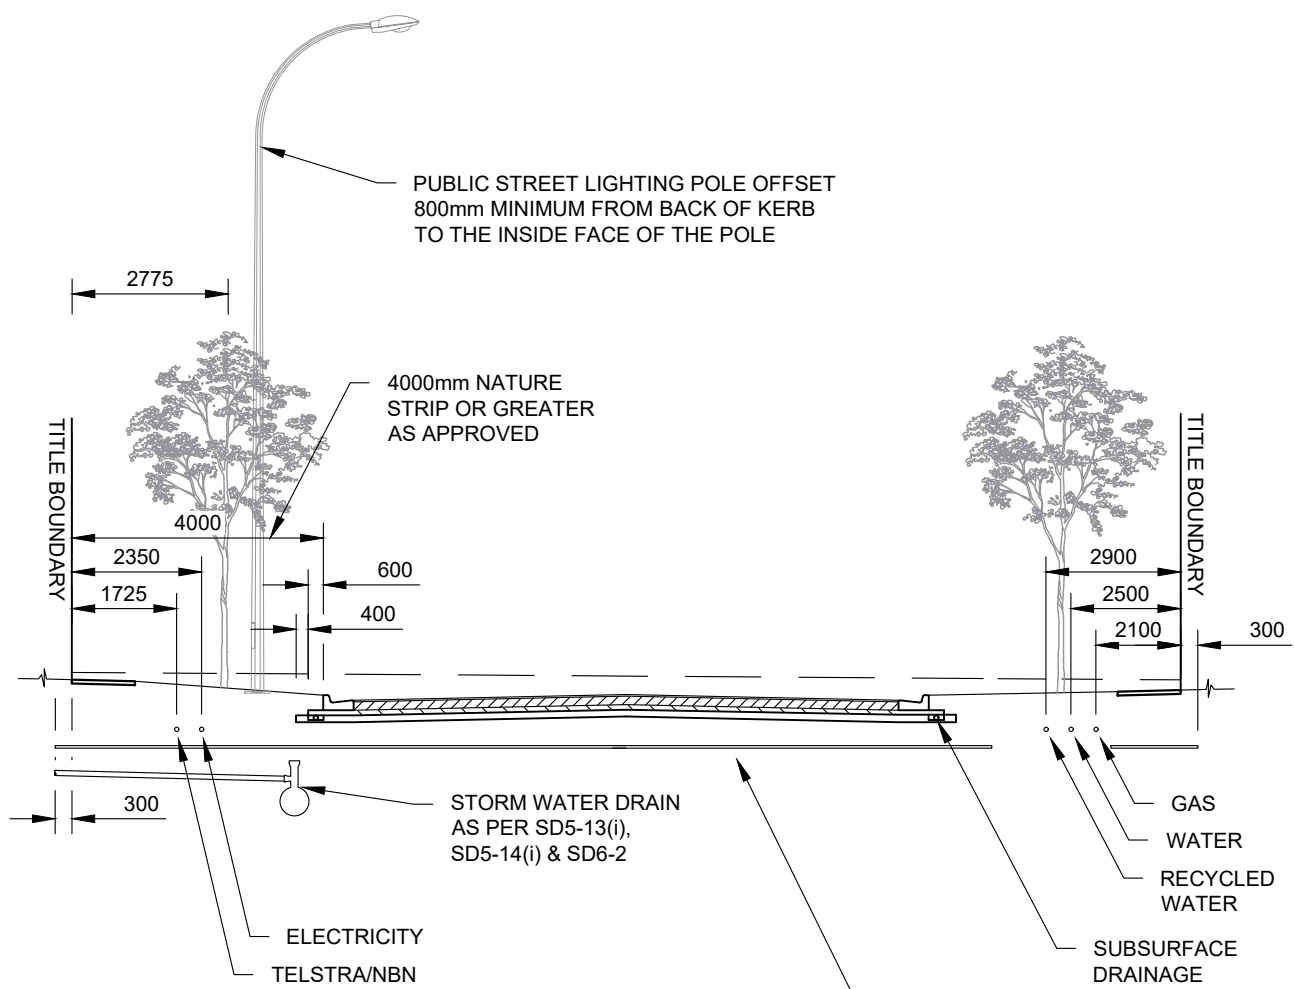

TYPICAL CROSS SECTION

2 No. 50mm Ø P.V.C. CONDUIT PER BLOCK WITH 300mm MINIMUM CLEARANCE BETWEEN ROAD PAVEMENT BOXING AND TOP OF UTILITY SERVICE. "W" AND "G" TO BE STAMPED ON FACE OF KERB ABOVE EACH CONDUIT IN ACCORDANCE WITH SD11-8

NOTES:

1. WATER OFFSET TO BE 2250mm IF GAS IS ON THE OPPOSITE SIDE OF THE STREET.
2. SERVICE OFFSETS TO BE APPROVED BY SUBDIVISIONS ENGINEER FOR NEW SUBDIVISION WORKS.
3. CONDUITS TO EXTEND TO 1500mm BEHIND BACK OF KERB. GAS CONDUIT TO EXTEND 300mm INTO THE ALLOTMENT WHERE FOOTPATH IS TO BE CONSTRUCTED AND 300mm PAST OFF STREET PARKING BAYS.
4. CONDUITS TO BE 300mm PVC CLASS 12 IN INDUSTRIAL AND COMMERCIAL ESTATES.
5. APPROVAL FROM COUNCIL AND THE APPROPRIATE SERVICE AUTHORITY IS REQUIRED FOR CHANGES TO SERVICE OFFSETS.
6. WHERE ONE FOOTPATH IS TO BE PROVIDED IT IS TO BE LOCATED ON THE LOW SIDE OF THE STREET UNLESS OTHERWISE SPECIFIED.
7. GAS AND WATER ARE TO BE LOCATED ON THE HIGH SIDE OF THE STREET.

REV	AMENDMENTS	APPROVAL	DATE
B	MINOR DRAFTING MODIFICATIONS		17-07-07
C	UPDATED TO REFLECT CURRENT STANDARDS	M.BRIGANDI	21-05-24

**ROAD & STREET CROSS SECTION
TYPICAL SERVICE LOCATIONS**

45 PRINCES HIGHWAY
WERRIBEE, VIC 3030

TEL: 1300 023 411
wyndham.vic.gov.au

CAD FILE: SD8-1.DWG
DRAWN DATE: FEB 2024
REVISION: C
DRAWING NO.: SD8-1

GENERAL NOTES: -DRAWINGS ARE NOT TO SCALE.
 -ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS OTHERWISE STATED.
 -FOR UP TO DATE DRAWINGS PLEASE CHECK WYNDHAM CITY COUNCIL WEBSITE.
 -ALL STANDARD DRAWINGS TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).