
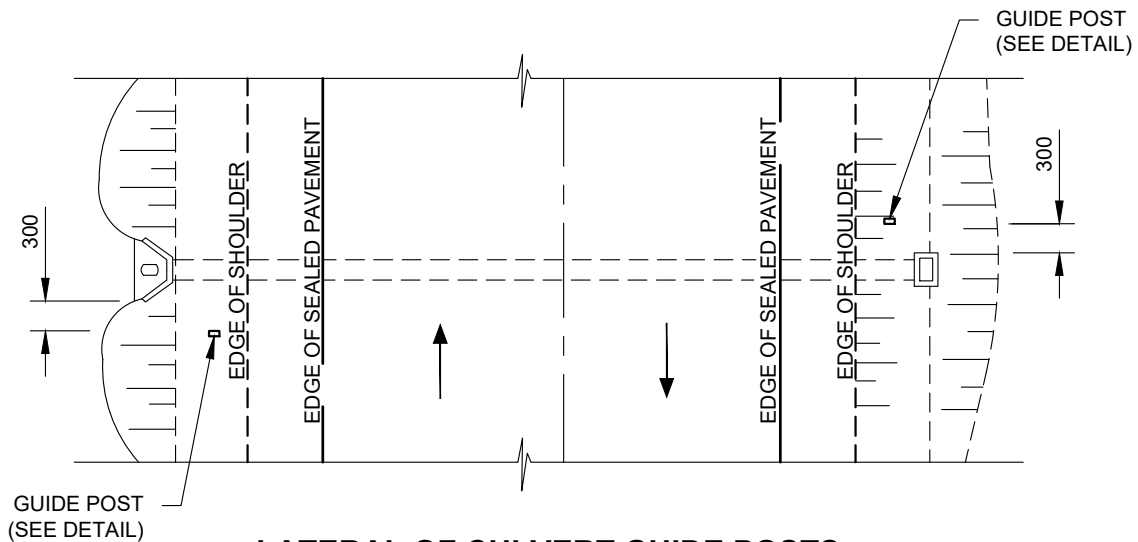


NOTES:

1. GUIDE POST TO BE FLEXIBLE PLASTIC OR FLEXIBLE STEEL POST AS APPROVED BY COUNCIL.
2. FOR DETAILS OF GUIDE POST SPACING AND SPECIAL TREATMENTS AT BRIDGES AND CULVERTS, REFER TO VICROADS TRAFFIC ENGINEERING MANUAL - VOLUME 2 PART 2.02.
3. DELINEATORS TO BE RED ON LEFT SIDE OF THE ROAD AND WHITE ON THE RIGHT SIDE OF THE ROAD.
4. ALL GUIDE POSTS TO BE INSTALLED IN ACCORDANCE WITH WCC SPECIFICATION SECTION 709.
5. THE STANDARD DELINEATOR IS THE 80mm dia. CIRCULAR CORNER-CUBE TYPE, RED OR WHITE, CONFORMING WITH THE DISCRETE DEVICE TYPE DELINEATOR AS SPECIFIED IN AS/NZS 1906.2.
6. SHEETING TYPE DELINEATORS SHALL HAVE A TOTAL MINIMUM REFLECTIVE OUTPUT EQUIVALENT TO 100cm² OF CLASS 1A RETROREFLECTIVE MATERIAL AS DEFINED IN AS/NZS 1906.2. THE WIDTH OF REFLECTIVE MATERIAL SHALL BE 40mm MINIMUM. ONLY ONE TYPE OF DELINEATOR SHALL BE USED AT ANY ONE LOCATION. RETROREFLECTIVE MATERIAL TO BE PLACED IN MANUFACTURES PREFERRED ORIENTATION TO GIVE OPTIMUM PERFORMANCE.
7. WHERE LOCATED ON A KERBED CARRIAGEWAY, GUIDE POSTS SHALL BE INSTALLED 600mm BEHIND FACE OR KERB.

GUIDE POSTS DETAILS

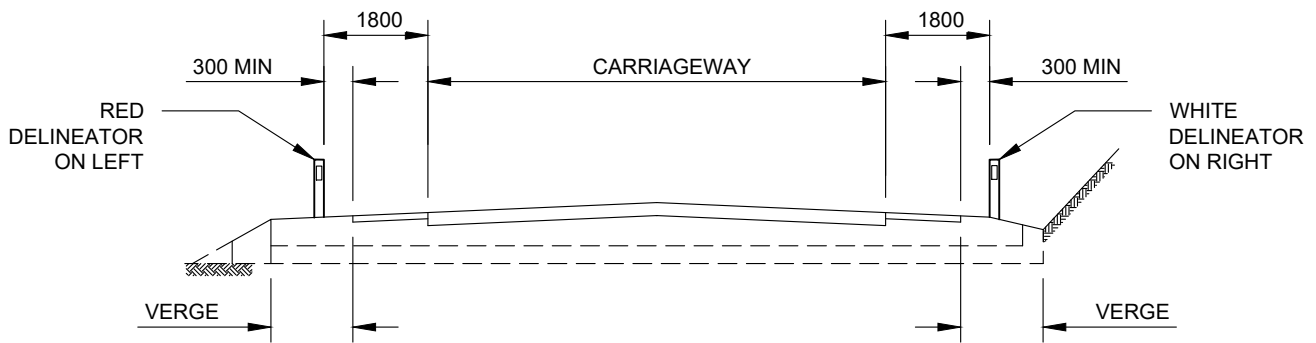

LATERAL OF CULVERT GUIDE POSTS

Drawing name: M:\Engineering Services\Engineering Design Projects\RESOURCE References\WCC Standard Drawings\SD11-2.dwg (28 May, 2024)

| REV | AMENDMENTS | APPROVAL | DATE |
|-----|---|------------|------------|
| B | DELETED NOTES, MINOR DRAFTING MODIFICATIONS | | 17-07-2007 |
| C | UPDATED TO REFLECT CURRENT STANDARDS | M.BRIGANDI | 21-05-24 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

| | | |
|--|---|--|
| GUIDE POST DETAIL | | |
| | | |
| 45 PRINCES HIGHWAY WERRIBEE, VIC 3030 | TEL: 1300 023 411 wyndham.vic.gov.au | |

| |
|-------------------------------|
| CAD FILE: SD11-2.DWG |
| DRAWN DATE: FEB 2024 |
| REVISION: C |
| DRAWING NO.: SD11-2 |

GENERAL NOTES:

- DRAWINGS ARE NOT TO SCALE.
- ALL MEASUREMENTS ARE IN MILLIMETERS UNLESS OTHERWISE STATED.
- FOR UP TO DATE DRAWINGS PLEASE CHECK WYNDHAM CITY COUNCIL WEBSITE.
- ALL STANDARD DRAWINGS TO BE USED IN CONJUNCTION WITH SD1-1 (STANDARD DRAWINGS CONDITIONS OF USE).